



A133 Power and versatility redefined.

13.3" All-Aluminum Touch Monitor

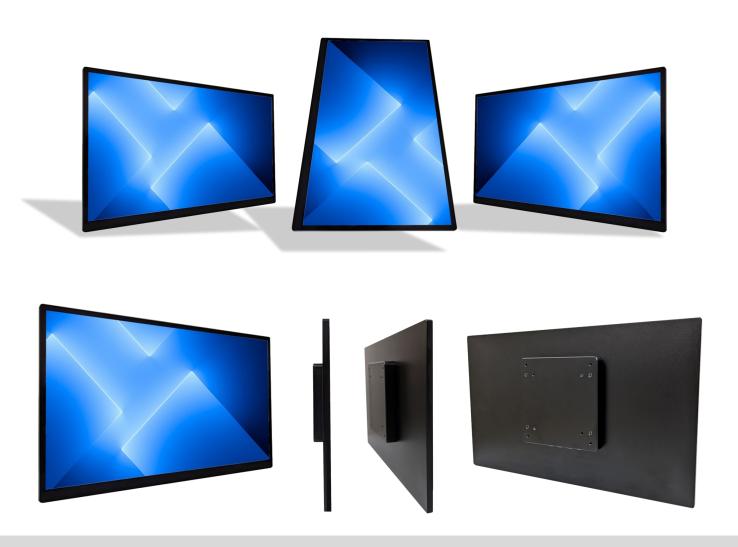

- ♦ Slim and stylish design that fits in any retail and industrial setting.
- ◆ USB Type-C DP Alternate Mode for a single cable solution.
- ◆ Aluminum alloy housing for industrial robustness.
- ◆ True-flat, narrow-bezel for an optimum viewing experience.
- **♦** 10-Points Projective Capacitive Touch.
- ◆ 1920x1080 Full HD resolution.
- ◆ 16:9 aspect ratio, making it ideal for landscape or portrait orientation.
- ♦ IP54-rated front bezel for water and dust protection.

EATURES

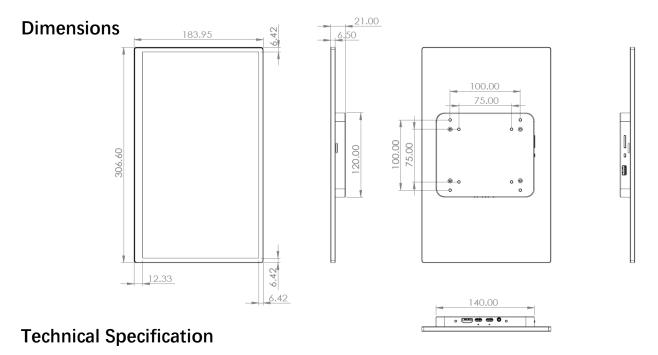

| | Model | A133 |
|-----------------------|-----------------------|---|
| LCD | Size | 13.3" |
| | Resolution | 1920 x 1080 |
| | Brightness | 300 cd/m2 (Typ.) |
| | Contrast Ratio (Typ.) | 800:1 |
| | Response Time (Typ.) | 25ms |
| | Viewing Angles (H/V) | 170° / 170° |
| | MTBF | 15,000 hrs (Min.) |
| Touch Screen | Туре | 10 Points Projected Capacitive |
| I/O | | 1 x USB-C (DP Alternate Mode/ DC-In 5V/3A) |
| | | 1 x DC-IN (5V/3A) |
| | | 1 x HDMI |
| | | 1 x USB 2.0 (downstream) |
| | | 1 x Audio-Out (3.5mm) |
| Internal Speaker | | 2 x 1Watt |
| Power | | External Power Adapter 5V/3A (in HDMI mode) |
| Environmental | Operating Temperature | 0°C ~ 40°C |
| | Storage Temperature | -20°C ~ 60°C |
| | Operating Humidity | 20% ~ 85% RH non-condensing |
| | Storage Humidity | 20% ~ 85% RH non-condensing |
| Housing | | Aluminum Alloy |
| Dimension (W x D x H) | | 306.6 * 184 * 22 mm |
| Weight (N.W./G.W.) | | 0.75kg / 2kgs |
| Wall Mount | | VESA 75*75mm, 100*100mm |

^{*} Specification is subject to change without prior notice.



PHISTEK INC.

5 F, No. 188, Section 3, Datong Road

Xizhi District, New Taipei City, TAIWAN

TEL: +886-2-8647-3168 FAX: +886-2-8647-3169