




7" Rimless USB LCD Monitor

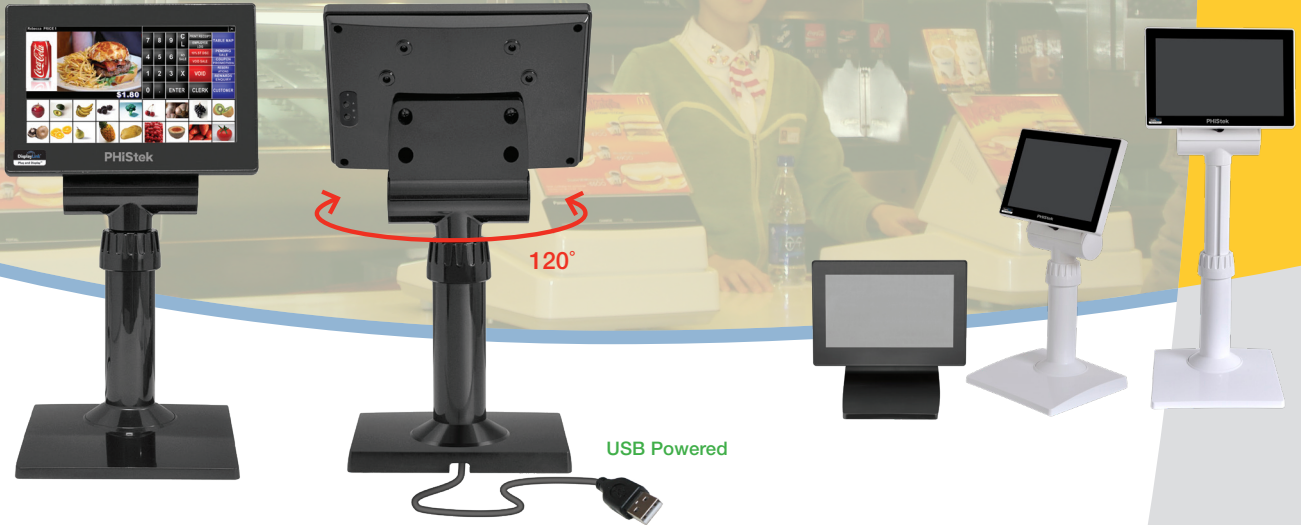

Features


1. Sleek surface throughout monitor's appearance
2. Replace out-of-date VFD customer display
3. Rimless front bezel with protection glass
4. Flexible pole base adjustment (**Patent certificate no.: M433068**)
5. Low power consumption only 2.5W with LED backlight
6. VESA 75 x 75 mm wall mount standard
7. Invisal down stream cable management
8. Rotate angle left/right max. 120°
9. Tilt angle upward max. 30°
10. USB interface, plug & play
11. Spill & dust proof

Specification


Model	P070UG
Cabinet Color	Black or White
Front Panel	Mitsubishi PMMA Hardness > 5H (JIS D0202), T > 93%
Display Type	7" diagonal TFT active matrix with LED backlight
Recommended Resolution	800 x 480
Brightness	150 cd/m ² (typ.)
Contrast Ratio	500:1 (typ.)
Response Time	30 ms (typ.)
Viewing Angle	130° (H) / 110° (V)
I/O Connectivity	Mini USB
Backlight MTBF	20,000 hrs (min.)

* Specification is subject to change without prior notice.

I/O indication

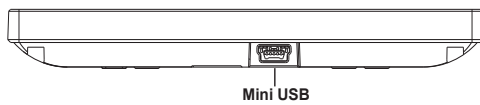

Dimension (unit: mm)

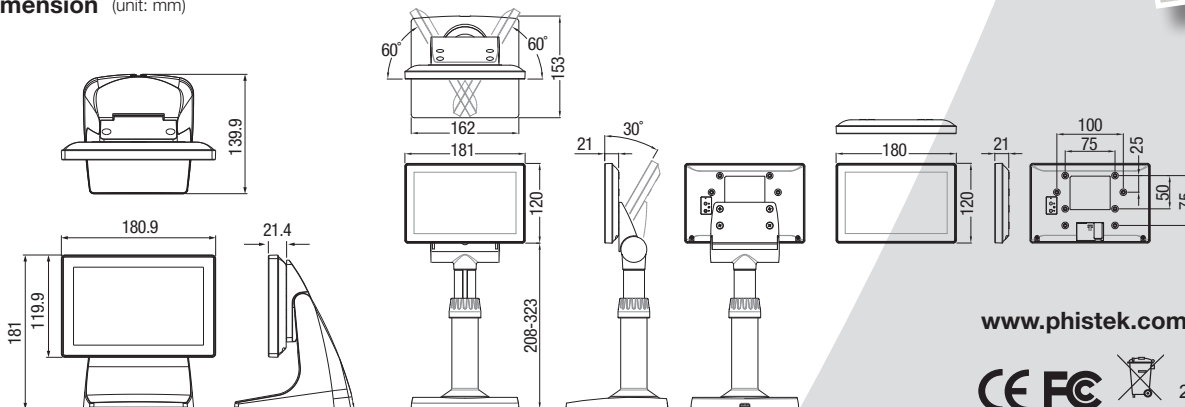

Application

Supermarket/Chain stores/Hospitality/Factory automation/Customer display

