



10.1" Rimless Wide LCD Monitor




USB Powered
Y Cable (Optional)

Features

1. Rimless front bezel design, spill & dust proof, Plastic rear cover
2. Low power consumption only 7W with LED backlight
3. Sleek surface throughout monitor's appearance
4. Display aspect for portrait type is available
5. VESA 75 x 75 mm wall mounting standard
6. User friendly control buttons
7. Integrated protection glass (**P101UG**)
8. Project capacitive touch Panel (**P101UP**)
9. Cabinet designed to fit variety USB accessories
10. Smart cable management
11. Small footprint

Application

Supermarket / Chain stores / Hospitality
/ QSR Factory automation

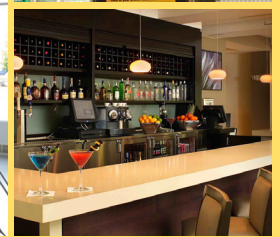


Specification

Model	P101UG / P101UP
Cabinet Color	Black or White (by MOQ)
Front panel	Mitsubishi PMMA Hardness > 5H (JIS D0202), T > 93% (P101UG) Projected capacitive touch Panel (P101UP)
Display Type	10.1" diagonal TFT active matrix with LED backlight
Recommended Resolution	1280×800
Panel Brightness	200 cd/m ² (Max.)
Contrast Ratio	800:1 (Typ.)
Viewing Angle	178° (H) / 178° (V)
I/O Connectivity	Mini USB × 1
Backlight MTBF	20,000 hrs (Min.)

* Specification is subject to change without prior notice.

Dimension (unit: mm)

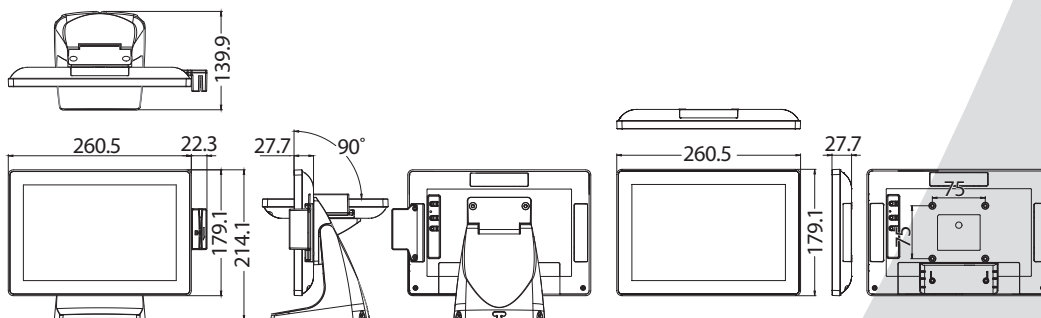

I/O indication

