

10.1" All-Aluminum USB-C Monitor

Elegance & Robustness





A Versatile Fit for All Settings

- Ultra-slim and stylish design that fits in any retail and industrial setting.
- ◆ USB Type-C DP Alternate Mode for a single cable solution.
- ◆ All-aluminum alloy housing for industrial robustness.
- ◆ True-flat, narrow bezel for an optimal viewing experience.
- ◆ 10-Points projected capacitive touch for the best user experience.
- ◆ Optical direct bonding to prevent internal condensation build-up.
- ◆ Optional anti-glare touch glass for undistracted readings.
- ◆ 16:10, 1280*800 resolution is ideal for landscape or portrait orientation.
- ◆ IP65 front bezel ingress protection.

FEATURES

Dimensions

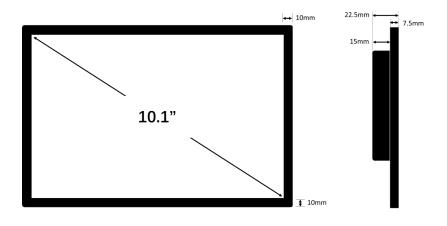



Technical Specification

Model		A101
LCD	Screen Size	10.1"
	Resolution	1280 x 800
	Aspect Ratio	16:10
	Brightness	400 cd/m2 (Typ.)
	Contrast Ratio (Typ.)	800 : 1
	Response Time (Typ.)	29ms
	Viewing Angles (H/V)	178° / 178°
	MTBF	30,000 hrs (Typ.)
Cover Glass	Туре	10-Points Projected Capacitive or Non-Touch
		Optional AG Coating
1/0		1 x USB-C (DP Alternate Mode)
		1 x DC-IN (Optional 12V/1.5A DC-In)
		1 x USB 2.0 (downstream)
Internal Speaker		Optional 2 x 1W Speakers
Environmental	Operating Temperature	0°C ~ 40°C
	Storage Temperature	-20°C ~ 60°C
	Operating Humidity	20% ~ 85% RH non-condensing
	Storage Humidity	20% ~ 85% RH non-condensing
Housing		Aluminum Alloy
Dimension (W x D x H)		232.5 * 156 * 22.5 mm
Weight (N.W.)		0.65Kg
Wall Mount		VESA 75*75mm

^{*} Specification is subject to change without prior notice.



PHISTEK INC.

5 F, No. 188, Section 3, Datong Road

Xizhi District, New Taipei City, TAIWAN

TEL: +886-2-8647-3168 FAX: +886-2-8647-3169