


16" All-Aluminum Mini-LED Touch Monitor



FEATURES

- ◆ Slim and stylish design that fits in any retail and industrial setting.
- ◆ USB Type-C DP Alternate Mode for a single cable solution.
- ◆ Aluminum alloy housing for industrial robustness.
- ◆ True-flat, narrow-bezel for an optimum viewing experience.
- ◆ 10-Points Projective Capacitive Touch.
- ◆ 16:10 aspect ratio, 2560x1600 WQXGA resolution.
- ◆ 1000nits high brightness makes it ideal for semi-outdoor applications.
- ◆ IP65-rated front bezel for water and dust protection.

Dimensions

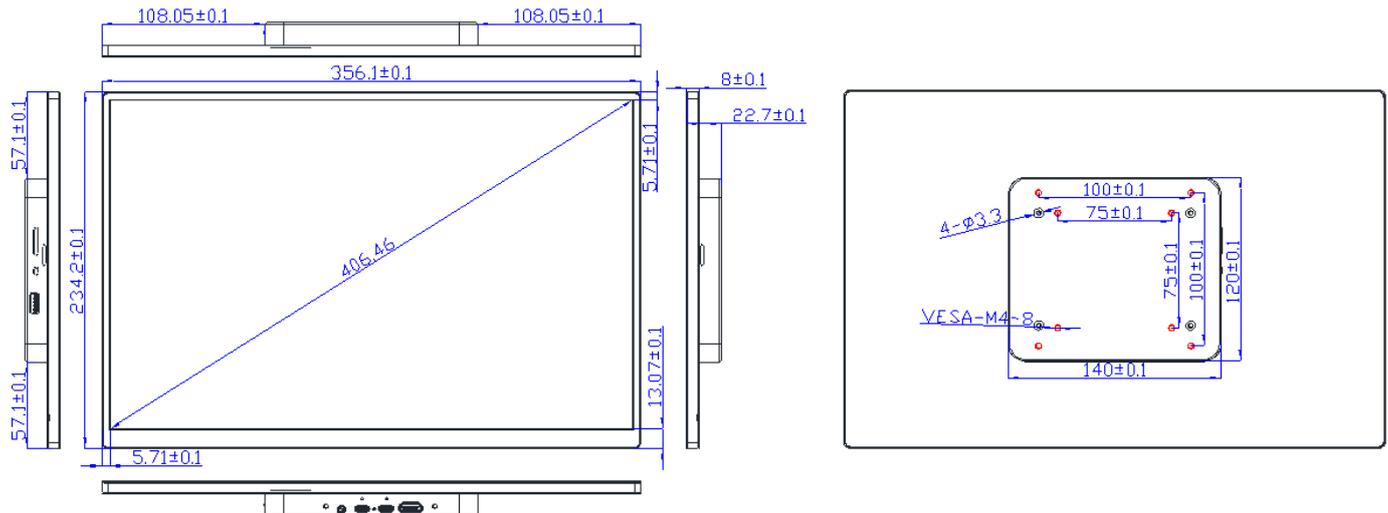

Technical Specification

Model		A160
LCD	Size	16" Mini-LED
	Resolution	2560 * 1600
	Brightness	1000 cd/m2 (Typ.)
	Contrast Ratio (Typ.)	1200:1
	Response Time (Typ.)	9ms
	Viewing Angles (H/V)	178° / 178°
	MTBF	15,000 hrs (Min.)
Touch Screen	Type	10 Points Projected Capacitive
I/O		1 * USB-C (DP Alternate Mode)
		1 * DC-IN (5V/3A)
		1 * HDMI
		1 * USB 2.0 (downstream)
		1 * Audio-Out (3.5mm)
Internal Speaker		2 * 1Watt
Power		External Power Adapter 5V/3A (Optional)
Environmental	Operating Temperature	0°C ~ 50°C
	Storage Temperature	-20°C ~ 70°C
	Operating Humidity	20% ~ 85% RH non-condensing
	Storage Humidity	20% ~ 85% RH non-condensing
Housing		Aluminum Alloy
Dimension (W x D x H)		356.1 * 234.2 * 22.7 mm
Weight (N.W./G.W.)		1.1kgs / 2.5kgs
Wall Mount		75*75mm & 100*100mm VESA

* Specification is subject to change without prior notice.

PHISTEK INC.

PHiStek
Industrial Solution Provider

5 F, No. 188, Section 3, Datong Road

Xizhi District, New Taipei City, TAIWAN

TEL: +886-2-8647-3168 FAX: +886-2-8647-3169