

32" High Brightness Touch Display

Your Go-To Outdoor Touch Display Solution!



2500nits · IK10 · IP65 · AG · AF · AR

APPLICATIONS



Factory Automation



Outdoor Signage



Drive-Thru



Vending Machine

FEATURES

Ultra-Bright 2500nits

Delivers crystal-clear visuals, even in direct sunlight.

SITO Touch Technology

10-point touch, precise and responsive.

Optical Bonding

Sharper images and prevents fogging caused by rapid temperature changes.

IK10 Vandal-Proof Display

Robust and durable for public environments.

IP65 Ingress Protection

IP54-rated front bezel for water and dust protection.

Anti-Glare, Anti-Reflective

Essential for applications where clarity and comfort matter most.

Optional Anti-UV, Anti-IR

Safeguarding against fading and discoloration caused by sunlight.


Wide Temperature Range

Operates from -20°C to 60°C.

Flexible Mounting Options

Open-frame and panel mountable.

Dimensions

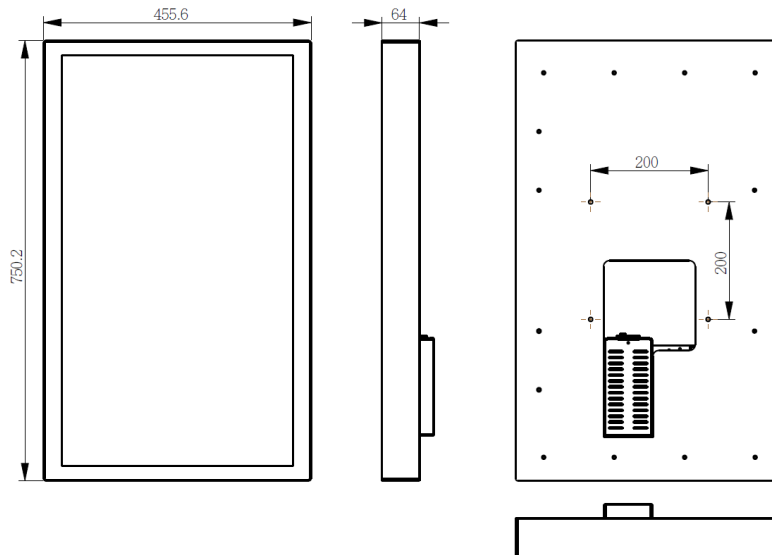

Technical Specification

Model		M320H
LCD	Size	32"
	Resolution	1920 x 1080
	Brightness	2,500 cd/m ² (Typ.)
	Contrast Ratio (Typ.)	4000 : 1
	Response Time (Typ.)	8ms
	Viewing Angles (H/V)	178°/178°
	MTBF	50,000hrs
Touch Screen	Type	10 Points Projected Capacitive
	Sensor	SITO Touch
	Glass Surface	Anti-Glare, Anti-Fingerprint (Anti-Reflective Optional)
	IK Rating	IK10
I/O		1 x HDMI
		1 x VGA
		1 x DP
		1 x USB-B (Touch)
		1 x Audio-Out (3.5mm)
Power		110V/220V AC
Environmental	Operating Temperature	-20°C ~ 60°C
	Storage Temperature	-30°C ~ 70°C
	Operating Humidity	20% ~ 85% RH non-condensing
	Storage Humidity	20% ~ 85% RH non-condensing
Housing		Metal (Open Frame Optional)
Dimension (W x D x H)		750 * 456 * 64 mm
Weight (N.W./G.W.)		19kgs / 21kgs
Wall Mount		VESA 200*200mm

* Specification is subject to change without prior notice.