

***10mm — Thinner than ever.***

**The Slimmest 21.5" Panel PC in the Industry**




## Features

- **Elegant Design** that seamlessly blends into any retail or industrial setting.
- **Ultra-Thin Borders** provide a broader, cleaner viewing experience.
- **Ultra-Slim Profile** — just **10mm** at its thinnest.
- **Direct Optical Bonding** ensures superior visibility and prevents water condensations.
- **Robust All-Aluminum** housing built to withstand demanding environments.
- **Fanless Design** with non-mechanical components for silent maintenance-free operation.
- **Full HD 1920x1080 Resolution** delivers the clarity needed for the critical tasks.
- **16:9 Aspect Ratio** — ideal for both landscape or portrait.
- **IP65-Rated** front panel offers excellent protection against dust and water.


Product Views



I/O Ports

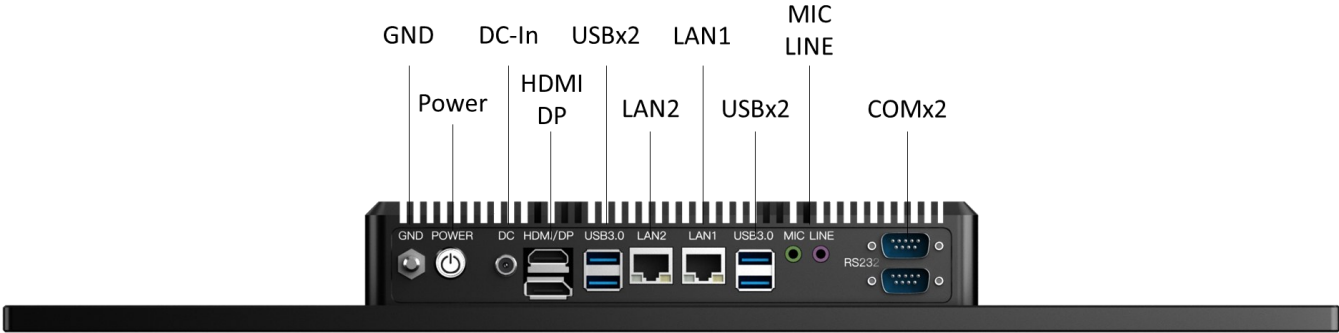

Dimensions

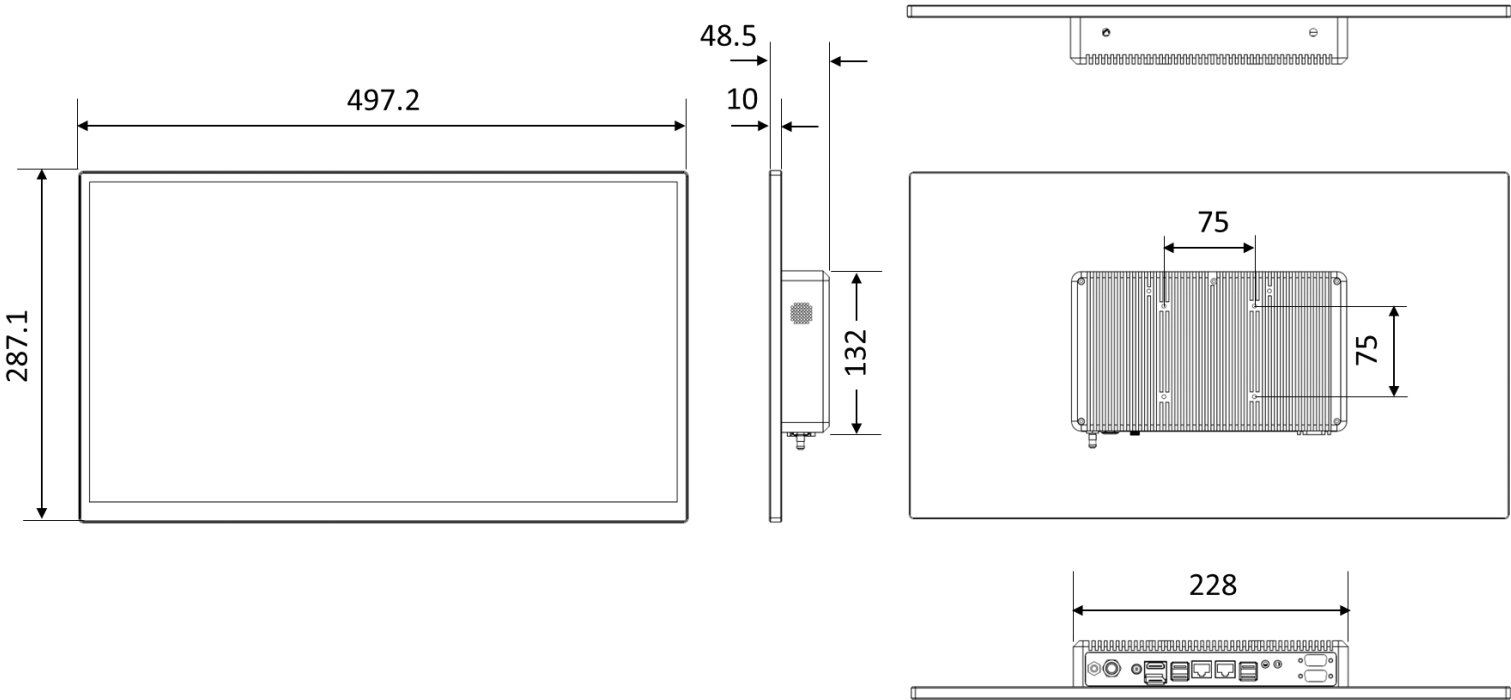

Technical Specifications

Model		PPC215A
CPU		Intel Elkhart Lake J6412 (4-Core, 2GHz)
System Memory		1 * DDR4, SO-DIMM, 2133MHz (Max. 16GB)
Graphic		Intel UHD Graphics
Storage	SSD	1 * M.2 (Max. 512GB)
LCD	Size	21.5" TFT LCD
	Resolution	1920 * 1080
	Brightness	350 cd/m2 (Typ.)
	Contrast Ratio (Typ.)	1200:1
	Viewing Angles (H/V)	178° / 178°
	MTBF	30,000 hrs (Min.)
Touch Screen	Type	10-Points Projected Capacitive
External I/O Port		4 * USB 3.0
		2 * COM (D-Sub RS232)
		1 * HDMI
		1 * DP
		2 * LAN (RJ45, Gigabit Ethernet)
		1 * Line-Out (3.5mm)
		1 * Mic-In (3.5mm)
		1 * DC-In (5.5*2.5mm, 12V/7A)
		1 * Power Button
Speaker		2 * 3Watt
Power		AC Power Adapter (12V/5A)
Environmental	Operating Temperature	0°C ~ 40°C
	Storage Temperature	-40°C ~ 80°C
	Operating Humidity	20% ~ 85% RH non-condensing
	Storage Humidity	20% ~ 85% RH non-condensing
Housing		Aluminum Alloy
OS Support		Windows® 11, Linux
Dimension (W * H * D)		497.24 * 287.14 * 50 mm
Weight (N.W./G.W.)		3.6Kgs / 5.5Kgs
Wall Mount (VESA)		75*75mm

\* Specifications are subject to change without prior notice.