


10.1" All-Aluminum Touch Display Monitor




- Ultra-slim, stylish design suitable for any retail or industrial setting.
- USB Type-C DP Alternate Mode for a single-cable solution.
- All-aluminum alloy housing for enhanced industrial durability.
- True-flat, narrow bezel for an optimal viewing experience.
- 10-point projected capacitive touch for a seamless user experience.
- Optical bonding to eliminate internal condensation and moisture buildup.
- 1280x800, 16:10 aspect ratio, optimized for landscape or portrait display .
- IP65-rated front bezel for water and dust ingress protection.

Perspective Views

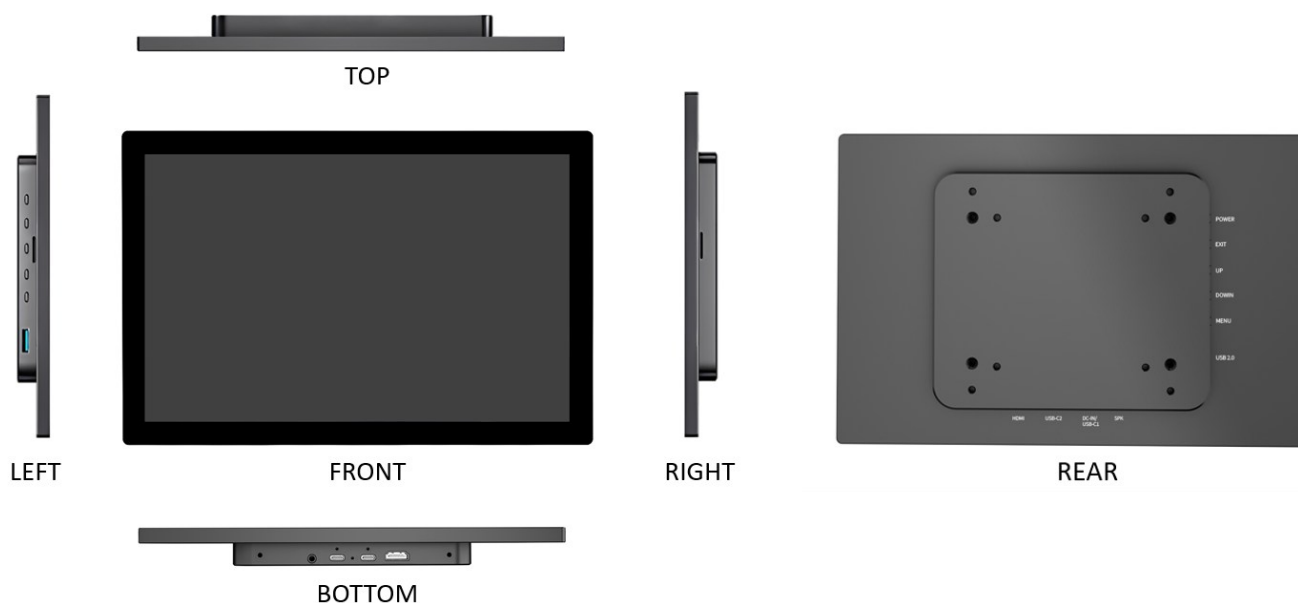

Dimensions

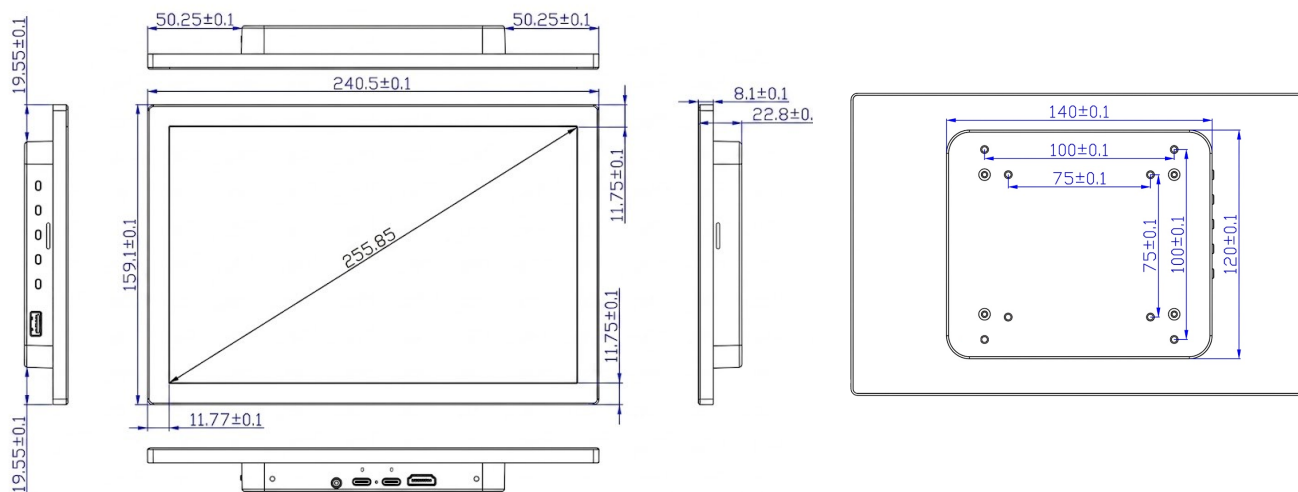

PHISTEK INC.

PHiStek
Industrial Solution Provider

5 F, No. 188, Section 3, Datong Road

Xizhi District, New Taipei City, TAIWAN

TEL: +886-2-8647-3168 FAX: +886-2-8647-3169

Copyright © 2026, Phistek Inc., All Rights Reserved.

Website: www.phistek.com

Technical Specification

Parameter / Feature	Specification Detail
Model	A101
LCD Panel Size	10.1 inches diagonal
Native Resolution	1280 × 800
Aspect Ratio	16 : 10
Display Brightness	500 cd/m² (Typical)
Contrast Ratio	1300 : 1 (Typical)
Response Time	30 ms (Typical)
Viewing Angles	170° / 170° (H/V)
Backlight MTBF	30,000 hours (Minimum)
Touch Screen Type	10-Point Projected Capacitive (GFF structure)
I/O Connectors	2× USB-C (DP Alt Mode + DC-In), 1× HDMI, 1× 3.5mm SPK (Audio Out), 1x USB 2.0 (Downstream)
Internal Speakers	2× 1 Watt (8 Ω) stereo speakers
OSD Language	English / 简体 / 繁體 / 한국어 / 日本語 / Francais / Italiano / Deutsch / Espanol / Russian
Power Supply	External DC Power Adapter (15W, 5V/3A)
Operating Environment	Temperature: 0°C to 40°C Humidity: 20% to 85% RH
Storage Environment	Temperature: -20°C to 60°C Humidity: 20% to 85% RH
Enclosure Material	Anodized All-Aluminum Alloy
Dimensions	240.5 mm × 159.1 mm × 22.8 mm (W x H x D)
Weight	Net Weight: 0.58 Kg
VESA Mount	75 × 75 mm and 100 × 100 mm

* Specification is subject to change without prior notice.

PHISTEK INC.

PHiStek
Industrial Solution Provider

5 F, No. 188, Section 3, Datong Road
Xizhi District, New Taipei City, TAIWAN
TEL: +886-2-8647-3168 FAX: +886-2-8647-3169